

JFB

JFB Hart Coatings, Inc.



VersaTek™

Premium, Ultra Durable Floor Finish


Costs Savings:	Reduces floor care costs up to 60%
High Performance:	Outperforms alternative products in virtually every category
Environmental:	No odor, low VOCs (< 30 g/l)
Abrasion Resistance:	Maintains gloss level
UV Resistant:	WILL NOT yellow!
Slip Co-Efficient:	Increased slip resistance
Clear & Color:	Available in high gloss clear and any color

VersaTek™ is available with Adhesion Plus™, GripLok™ and GripLok Gloss™

VersaTek™

Technical Specifications

Gloss @ 60° Angle:	VersaTek: Up to 95°
Available Gloss/Color:	Available in clear and any color
Weight Gallon:	Clear: 8.92 lbs./gallon kit Color: 7.8 – 10.3 lbs./gallon kit
	Combined Parts A, B & C
Catalyze Ratio:	As supplied in pre-measured kit
Weight Solids:	66% ±3% Catalyzed and Reduced
Volume Solids:	55% ±3% Catalyzed and Reduced
Flashpoint:	>185° F
VOCs:	Less than 30 g/l
Adhesion (ASTM D3359):	Average results 5B (0% removed)
Humidity (ASTM D2247):	No change at 1,000 hours
Abrasion (ASTM D4060):	10-20 mg loss
Hardness (ASTM D3363):	Gouge: 4H; Scratch H
Impact Resistance (ASTM D2794):	20 in-lbs.
Flexibility (ASTM D522):	Cracking resistance: <1/8"
QUV (ASTM D4587) @ 5,000 hours:	Color Change: less than 2.0 delta E change Gloss Change: less than 30 gloss change
Chemical Resistance: MEK – double rubs	1,500 double rubs
Application Viscosity:	65 – 75 KU Catalyzed and Reduced
Application Conditions:	Up to 80% Relative Humidity 40° – 95° F Air and Surface Temperature
Recommended Film Thickness:	Wet: 4 – 5 mils Dry: 2.4 – 3 mils
Actual Spread Rate:	Approximately 250-400 square feet per gallon, per coat
Pot Life:	90 minutes
Shelf Life:	1 year (12 months)
Dry Time:	To touch: 4 hours To walk on: 8 hours
Recommended Coats:	One or two, depends on performance requirements and substrate profile
Clean-Up:	Water, or you may use a mixture of water and a small amount of ammonia
Applications Substrates:	Concrete, ceramic, quarry tile

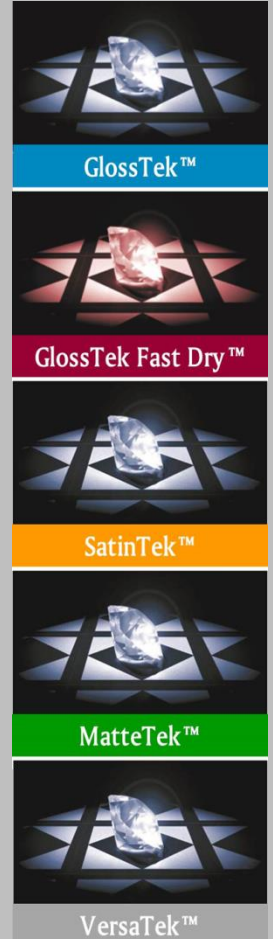

GlossTek Additives:

- ◆ Adhesion Plus
- ◆ GripLok
- ◆ GripLok Gloss

JFB Hart Coatings, Inc.

10210 Werch Drive – Suite 203
Woodridge, Illinois 60517

www.jfbhartcoatings.com

630-633-6228 ◆ 630-633-6238 fax

Revised: March 2011

