

# JFB

JFB Hart Coatings, Inc.



## GlossTek™ Fast Dry

**Premium, Ultra Durable Floor Finish**

- |                             |  |
|-----------------------------|--|
| <b>Costs Savings:</b>       | Reduces floor care costs on average 45% or more              |
| <b>Less Disruptions:</b>    | Floors don't need to be burnished or stripped                |
| <b>High Performance:</b>    | Outperforms alternative products in virtually every category |
| <b>Environmental:</b>       | No odor, low VOCs (< 50 g/l)                                 |
| <b>Abrasion Resistance:</b> | Maintains gloss level  |
| <b>UV Resistant:</b>        | WILL NOT yellow!   |
| <b>Slip Co-Efficient:</b>   | Certified High Traction by NFSI                              |


GlossTek™ is available with Adhesion Plus™, GripLok™ and GripLok Gloss™



# GlossTek™ Fast Dry

## Technical Specifications

<b>GLOSS @ 60° ANGLE:</b>	GlossTek Fast Dry: Up to 95°
<b>WEIGHT GALLON:</b>	8.26 lbs./gallon kit
	Combined Parts A, B & C
<b>CATALYZE RATIO:</b>	As supplied in pre-measured kit
<b>WEIGHT SOLIDS:</b>	45% ±3% Catalyzed and Reduced
<b>VOLUME SOLIDS:</b>	43% ±3% Catalyzed and Reduced
<b>FREEZE THAW STABILITY:</b>	3 cycles
<b>FLASHPOINT:</b>	>120° F
<b>VOCs:</b>	Parts A+B+ water reducer: Zero-VOC Parts A+B & Part C (as supplied reducer): .4 lbs./gallon <50 grams/liter
<b>ADHESION (ASTM D3359):</b>	Average results 5B (0% removed)
<b>HUMIDITY (ASTM D2247):</b>	Minimal change at 1,500 hours
<b>ABRASION (ASTM D4060):</b>	Average of 1,500 cycles to wear throughout
<b>HARDNESS (ASTM D3363):</b>	Gouge: F; Scratch 2B
<b>XENON ARC WEATHERING: (G155) @ 1,500 hours</b>	No measurable gloss loss or yellowing
<b>CHEMICAL RESISTANCE:</b> Methyl Ethyl Ketone – double rubs	1,500 double rubs
<b>APPLICATION VISCOSITY:</b>	80 KU Catalyzed and Reduced
<b>APPLICATION CONDITIONS:</b>	Up to 80% Relative Humidity 40° – 95° F Air and Surface Temperature
<b>RECOMMENDED FILM THICKNESS:</b>	Wet: 2 – 6 mils Dry: 1 – 3 mils
<b>ACTUAL SPREAD RATE:</b>	Approximately 325 square feet per gallon, per coat
<b>POT LIFE:</b>	45 minutes – 1 hour
<b>RECOMMENDED COATS:</b>	One or two, depends on performance requirements and substrate profile
<b>CLEAN-UP:</b>	Water, or you may use a mixture of water and a small amount of ammonia

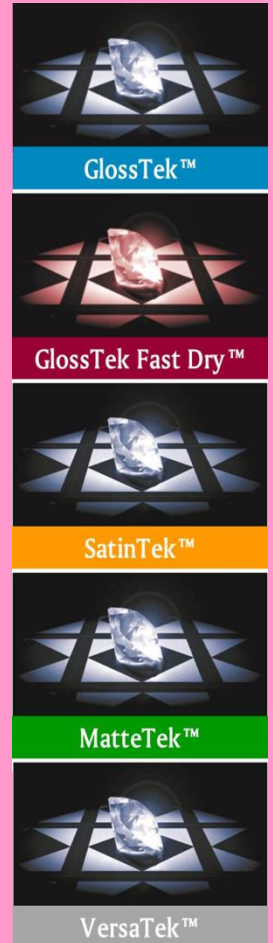

**JFB Hart Coatings, Inc.**  
10210 Werch Drive – Suite 203  
Woodridge, Illinois 60517  
[www.jfbhartcoatings.com](http://www.jfbhartcoatings.com)  
630-633-6228 ♦ 630-633-6238 fax

Revised: March 2011

